

# Free Standing Digital Signage

## Stunning HD Display with Touchscreen

Glamourise your space and increase visitor engagement with these high definition screens.

Applicable for various type of premise, from shopping malls to universities, banks to hospitals, offices to hotels.



### Why Digital Signage?

Current Trend & Statistic




**400%**

Captures More Views than Static Displays



**83%**

of Recall Rate (Higher than Any Other Media)



Has a **47.7%**

Effectiveness on Brand Awareness

### Main Benefit of Using Digital Signage




#### Highly Effective Marketing Tool for Products & Services

Increase your revenue with targeted & continuous display of advertisement.



#### Powerful Communication Channel with Audiences

Attract more audiences & boost awareness with provision of informative & captivating contents.

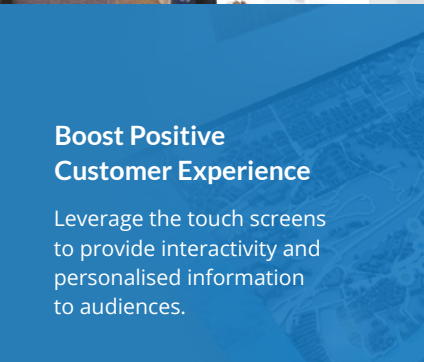


#### Boost Positive Customer Experience

Leverage the touch screens to provide interactivity and personalised information to audiences.



#### Enhanced Corporate Branding & Image

Through provision of strategically placed digital signage with personalised & professional display design.

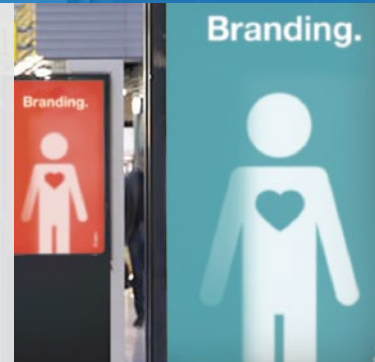

## Touchscreen Digital Signage Kiosk with All-in-One Computer & Display



Model	220CBTPC	240CBTPC	320CBTPC	430CBTPC	490CBTPC	550CBTPC	650CBTPC
<b>PANEL SPECIFICATIONS</b>							
<b>Panel Model</b>	21.5 inch TFT LED	24inch TFT LED	32inch TFT LED	43inch TFT LCD	49inch TFT LCD	55inch TFT LED	65inch TFT LED
<b>Max Resolution</b>	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
<b>Aspect Ratio</b>	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9
<b>Pixel Pitch</b>	0.24825*0.24825	0.27675*0.27675	0.36375*0.36375	0.4903*0.4903	0.53025*0.53025	0.63*0.63	0.744*0.744
<b>Viewing Angle</b>	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
<b>Contrast Ratio</b>	3000:1	3000:1	4000:1	1200:1	1000:1	1400:1	5000:1
<b>Brightness</b>	300cd/m	2300cd/m	2500cd/m	2500cd/m	2500cd/m	2500cd/m	2500cd/m2
<b>Response Time</b>	18ms	25ms	6.5ms	26ms	12ms	6ms	8ms
<b>APPEARANCE</b>							
<b>Case Material</b>	Metal Case	Metal Case	Metal Case	Metal Case	Metal Case	Metal Case	Metal Case
<b>Case Color</b>	White	White	White	White	White	White	White
<b>Power Input</b>	AC 100-240V						
<b>Connectivity</b>	LAN RJ45 Port • WIFI Built-In WIFI 802.11B/G/N • 3G (Optional) WCDMA						
<b>Storage Temp</b>	0-65 Degree						
<b>Working Temp</b>	0-50 Degree						
<b>Storage Humidity</b>	10-90%						
<b>Working Humidity</b>	10-90%						
<b>Certificates</b>	CE/FCC/ROHS						
<b>PC SPECIFICATIONS</b>							
<b>CPU</b>	Intel® Core® Processor I3						
<b>Chipset</b>	Intel® HM76						
<b>Memory</b>	4GB RAM, 120 GB SSD						
<b>Storage</b>	1* Serial ATA2 6Gb/s connectors • 1* Mini-SATA connector (SATA1 or MINI-SATA)						
<b>Audio</b>	Realtek ALC662						
<b>Power Input</b>	DC 12V						
<b>Ethernet LAN</b>	1*RTL8111E/8105E LAN						
<b>Rear Panel</b>	1*DC 12V IN port • 1*HDMI port • 1*VGA port • 1*RJ-45 port • 4* USB 2.0 ports • 2* Audio I/O ports (Mic and Line-out)						
<b>Support OS</b>	Windows 7/8/10, Linux						
<b>Built-in Speakers</b>	Yes						
<b>Touch Screen</b>	Options						


## Commercial Free Standing Digital Signage with All-in-One Computer & Display



Model	320LBPC	430LBPC	490LBPC	550LBPC	650LBPC
<b>PANEL SPECIFICATIONS</b>					
<b>Panel Model</b>	32inch TFT LED	43inch TFT LED	49inch TFT LCD	55inch TFT LED	65inch TFT LED
<b>Max Resolution</b>	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
<b>Aspect Ratio</b>	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9
<b>Pixel Pitch</b>	0.36375*0.36375	0.4903*0.4903	0.53025*0.53025	0.63*0.63	0.744*0.744
<b>Viewing Angle</b>	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
<b>Contrast Ratio</b>	4000:1	1200:1	1000:1	1400:1	5000:1
<b>Brightness</b>	400cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2
<b>Response Time</b>	6.5ms	26ms	12ms	6ms	8ms
<b>Operation Temp</b>	(0-50 Degree)	(0-50 Degree)	(0-50 Degree)	(0-50 Degree)	(0-50 Degree)
<b>Panel Size</b>	741.4x435.8x22.4mm	973x565.8x29mm	1096.2x632.5x29mm	1244.6x720.9mm	1450.5x828.5x30.8mm
<b>Power Input</b>	AC 100-240V				
<b>Storage Temp</b>	0-65 Degree				
<b>Working Temp</b>	0-50 Degree				
<b>Storage Humidity</b>	10-90%				
<b>Working Humidity</b>	10-90%				
<b>Certificates</b>	CE/FCC/ROHS				
<b>PC SPECIFICATIONS</b>					
<b>CPU</b>	Intel® Core® Processor I3				
<b>Chipset</b>	Intel® HM76				
<b>Memory</b>	4GB RAM, 120 GB SSD				
<b>Storage</b>	1* Serial ATA2 6Gb/s connectors • 1* Mini-SATA connector (SATA1 or MINI-SATA)				
<b>Audio</b>	Realtek ALC662				
<b>Power Input</b>	DC 12V				
<b>Ethernet LAN</b>	1*RTL8111E/8105E LAN				
<b>Rear Panel</b>	1*DC 12V IN port • 1*HDMI port • 1*VGA port • 1*RJ-45 port • 4* USB 2.0 ports • 2* Audio I/O ports (Mic and Line-out)				
<b>Support OS</b>	Windows 7/8/10, Linux				
<b>Built-in Speakers</b>	Yes				
<b>Touch Screen</b>	Options				



# Commercial Free Standing Digital Signage with Brochure Holder

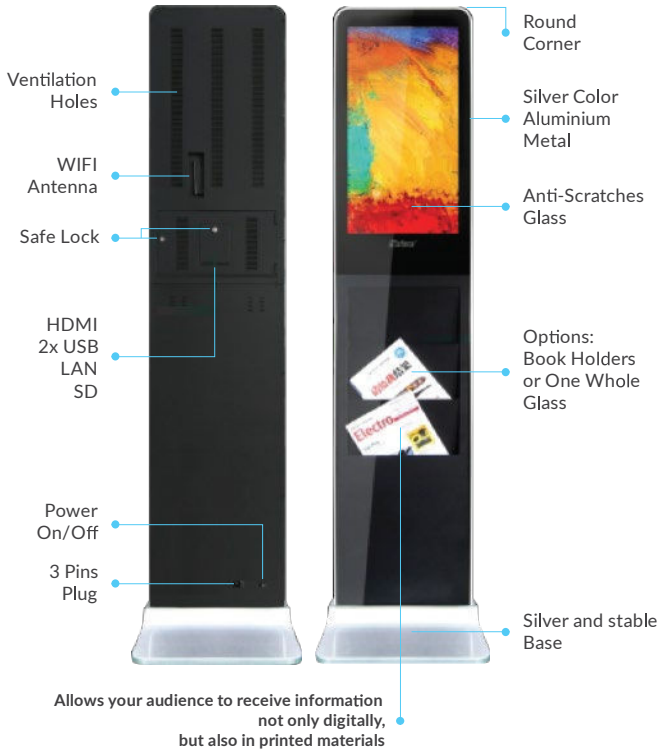

SPECIFICATIONS			
PANEL		CONNECTOR	
Panel Model	21.5inch TFT LED	USB 2.0	x2 3G SIM (Optional)
Max Resolution	1920x1080	HDMI (Output)	x1 x1
Aspect Ratio	16:09	SD	x1
Pixel Pitch	0.24825 x 0.24825	RJ45	x1
Viewing Angle	89/89/89/89	INTERNAL MEDIA PLAYER	
Contrast Ratio	3000:1		
Brightness	250cd/m2	CPU	Quad-core ARM Cortex-A9,1.6GHz
Response Time	18ms	GPU	ARM Mali-400MP4
Display Area (mm)	476.64 x 268.11mm	RAM	1/2GB DDR3
Panel Size(mm)	495.6 x 292.2 x 8.6 m	ROM	8/16 G B Flash
Screen Weight	1.67Kg	OS	Android 4.4
Lamp Type	WLED		
CONNECTIVITY			
LAN	RJ45 Port, 10/100M Ethernet	3G (Optional)	WCDMA
WIFI	Built-in WiFi 802.11 B/G/N		
FILE SUPPORT			
Video	H.264, MKV, WMV9, MPEG 1/2/4, H D Divx, Xvid, RM/RMVB;		
Image	BMP / PNG / GIF / JPEG		
Audio	MP3, WMA, WAV, EAAC+, MP2 dec, Vorbis (Ogg), AC3, FLAC, APE, BSAC		
Scrolling Text	txt		
HDMI DISPLAY			
Output Mode	HDMI 480P, HDMI 576P, HDMI 720P 50Hz, HDMI 720P 60Hz, HDMI 1080I 50Hz, HDMI 1080I 60Hz, HDMI 1080P 24Hz, HDMI 1080P 50Hz, HDMI 1080P 60Hz		
DISPLAY MODE		ON-SCREEN DISPLAY LANGUAGES	
Portrait & Landscape		English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.	
POWER		SOUND	
Mains Power	AC 100-240V, 50-60 Hz	Built-in Speakers	2x10W
Consumption	25 W		
DIMENSION & WEIGHT			
Machine Size	1562.5x40x350mm • 370x50x375mm(stand base)		
Machine Weight	21.3KG / 4.7 KG(stand base)		
Carton Size	1640 x 197 x 462 mm		
Carton Weight	38KG		
Wooden Case Size	1670 x 1015 x 492mm (5PCS)		
Wooden Case Weight	190KG		
OTHERS		ACCESSORIES	
Regulatory Approvals	CE, FCC, ROHS	Included	Remote Control, Power supply, User manual, Keys, Tools and Screws
Warranty	1 year warranty		



Branch Transformation | Customer Experience | Digital Teller Automation | Self-service Solution  
Cash & Cheque Processing Solution | Digital Signage | RPA | Ergonomic Solution | Maintenance Service

<p><b>30+ YEARS OF EXPERIENCES</b></p>	<p><b>TRUSTED BY MAJOR COMPANIES ACROSS SECTORS</b></p>	<p><b>NATIONWIDE TECHNICAL SUPPORT WITH 100+ SERVICE POINTS AND 24/7 HELPDESK</b></p>	<p><b>CORE COMPETENCY IN PUBLIC INFORMATION DISPLAY &amp; DIGITAL TRANSFORMATION SOLUTIONS</b></p>	<p><b>SUPPORTED BY MORE THAN 700 DEDICATED STAFF AND TECHNICIANS</b></p>
--	---	---	--	--

**JAKARTA (Head Office & Multisector Simulation Room)**  
Jl. Lingkar Luar Barat No.1, P +62-21 584 1060  
Jakarta Barat 11750, Indonesia F +62-21 587 4505

**BANDUNG** +62-22 205 63705  
**SURABAYA** +62-31 593 0010  
**MEDAN** +62-61 453 2994

**YOGYAKARTA** +62-274 883 506  
**DENPASAR** +62-361 499 323  
**SEMARANG** +62-24 764 34391



1500913 (Sales) 1500013 (Helpdesk) info@murni.co.id PT Murni Solusindo Nusantara

ISO 9001:2015 Certified No. ID 14/02656